




FLEXON: As multifaceted as the requirements of your customers



The unique dual-stroke, two-part grid system facilitates precise dicing and stripe dicing of the most delicate products by providing twice the normal cutting length at reduced cutting pressure.



The small distance between the blade and grid-set, the so-called "scissors' cutting principle", is one of the essential prerequisites for achieving excellent cutting results. So-called "goulash chains" are prevented.



As a result of the patented DHS (Dynamic Hydraulic System), the cut products stay fresh longer (the machine generates less heat, so there is less of a chance for bacteria to form).



Various products such as cheese, radishes, carrots or coleslaw can be grated coarsely or finely.



The drive is synched automatically after the machine is turned on.



A typical task of FLEXON: dicing pork into thin stripes.

FLEXON can be used for a variety of applications and is designed to meet the needs of small to medium sized companies and catering businesses.



The separating slide operates in a curving motion. This enables user-friendly, one-hand operation.



FLEXON is multi-faceted and can even cut products such as cucumbers.


Meat, sausage, and cheese can be diced or cut into stripes, but it is also able to grate cheese or slice potatoes and cucumbers. The machine can process products up to 550 mm in length and manages to produce up to 1,400 kg per hour (theoretical maximum value).

FLEXON is easy to operate

Ergonomic, one-hand operating system for closing the product loading chamber. The operator can easily activate the closing mechanism with one hand to move the separating slide into position.

Technical data:

Max. output t/h (theoretical maximum value)	1,4; 3,086 lbs
Max. cut-off length (mm/inch)	0,5–32; 1/5"–1 3/10"
Housing dimensions (mm/inch)	
Length/Width/Height (mm/inch)	1,517/748/1,050; 60" / 29 2/5" / 41 3/10"
Connecting load (kW)	1.2
Gridsets (mm/inch)	4/5/6/8/10/12/14/16/20/24/32/48; 1/5"; 1/4"; 3/10"; 2/5"; 1/2"; 3/5"; 4/5"; 9/10"; 1 1/4"; 1 4/5"
Weight (kg/lb)	approx. 230; 507
Product specific accessoires	on request

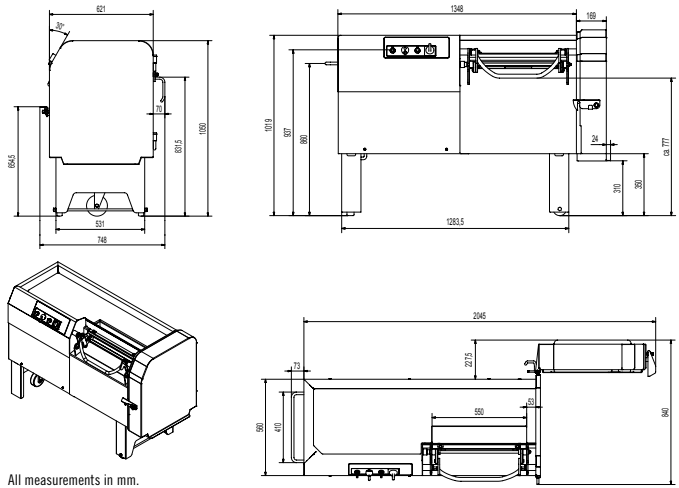

The output capacity can be increased with the double blade.



For dicing cheese a special cheese grid is used.



Grating disc: Accessories such as for slicing potatoes in thin stripes or for grating cheese boost your flexibility.

Your benefits at a glance:

- Manual operation
- High cutting output due to the generous cutting chamber size of 550 x 96 x 96 mm (21 7/10" x 3 4/5" x 3 4/5")
- Optimum product compression as a result of the automatic pre-compression system
- Ergonomic, one-hand operating system for closing the product loading chamber
- Flexibility thanks to choice between continuous and intermittent cutting
- Even the cleaning is ergonomic
- The patented DHS system (Dynamic Hydraulic System) reduces the machine's heat load, which saves energy and keeps the product fresh longer, and is proven to reduce the wear and tear on the machine as well.

www.treif.com

HEADQUARTERS:

TREIF Maschinenbau GmbH
Südstraße 4
D-57641 Oberlahr
Tel. +49 2685 944 0
Fax +49 2685 1025
E-Mail: info@treif.com

LOCATIONS:

TREIF S.A.R.L.
22, rue des Tuileries
F-67460 Souffelweyersheim
Tel. +33 3 8818 4018
Fax +33 3 8818 4019
E-Mail: info-france@treif.com

TREIF USA Inc.
50 Waterview Drive, Suite 130
USA-Shelton CT 06484
Tel. +1 203 929 9930
Fax +1 203 929 9949
E-Mail: treifusa@treif.com

TREIF U.K. Ltd.
4 Europa Park
Croft Way Eastways
GB-Witham Essex CM 8 2FN
Tel. +44 1376 504060
Fax +44 1376 504070
E-Mail: info@treif.co.uk

TREIF in Belgium
Villalaan 21
B-9320 Aalst
Tel. +32 53 770813
Fax + 32 53 789666
E-Mail: jo.luyjaert@treif.com

TREIF China
TREIF Maschinenbau GmbH
Room 212, No. 188 Zhangyang Rd.
PRC-Shanghai, 200120 China
Tel. +86 21 5879 8255
Fax +86 21 5879 8256
E-Mail: treif.china@treif.com