





High-end dices at a low price: TWISTER basic



The AVS (automatic pre-compression system) facilitates an optimal dimensional accuracy of the dices and strips right from the beginning.



Goulash cubes – a typical product for the TWISTER basic.



Competitor

As a result of the patented DHS (Dynamic Hydraulic System), the cut products stay fresh longer (the machine generates less heat, so there is less of a chance for bacteria to form).



Cutting poultry into strips is also part of the "line of action" of the machine.



Extremely easy to insert, so that no time is lost for cleaning and refitting: "click&go" grid.



With an hourly output of up to 2.0 t (theoretical maximum value), the machine is ideally suited for manual artisan and mid-range applications.

The dice and strip cutting machine TWISTER basic is ideal for all who are looking for a cost-effective solution for perfect cutting quality in the mid-range performance class.



The separating slide operates in a curving motion. This enables user-friendly, one-hand operation.



The slice length can be selected within a range of 0.5 mm to 34 mm.


In one hour the machine achieves an output of up to 2,000 kg (theoretical maximum value), even during constant operation. The cutting chamber has a generous size of 550 x 120 x 120 mm (L x W x H), ensuring a high fill volume.

High standards

TWISTER basic is a solid machine that impresses with its easy equipment and nevertheless convinces with high standards.

Technical data:

Max. output t/h (Theoretical maximum value)	2,0; 4,410 lbs
Max. cut-off length (mm/inch)	0,5–34; 1/5"–1 2/5"
Max. cut-off blade speed/min. (fixed blade speed)	180
Housing dimensions (mm/inch)	
Length/Width/Height (mm/inch)	1,902/1,731/1,280; 74 4/5" / 68" / 50 2/5"
Connecting load (kW)	4.0
Gridsets (mm/inch)	4/5/6/8/10/12/13/15/17/20/24/30/40/60; 1/5"; 3/10"; 2/5"; 1/2"; 3/5"; 7/10"; 5/4"; 1"; 1 1/5"; 1 3/5"
Weight (kg/lb)	approx. 670; 1,477
Product specific accessories	on request

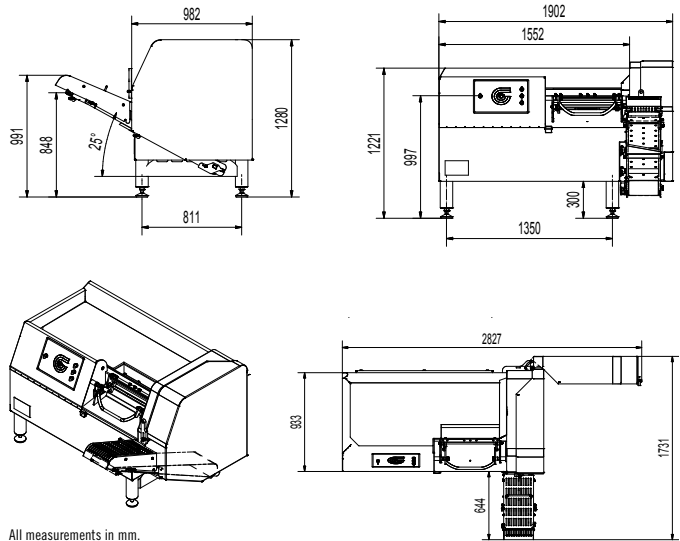

All measurements in mm.



Cleaning channel for a better flow of liquids, e.g. meat juice, rinsing water.



For dicing cheese a special cheese grid is used.



Simple operation.

Your benefits at a glance:

- Basic model from the TWISTER family
- Flexibility and strong performance thanks to choice between continuous and intermittent cutting
- Optimum product compression as a result of the automatic pre-compression system (AVS)
- Ergonomic, one-hand operating system for the closing of the product loading chamber; chamber size: 550 x 120 x 120 mm / 4 7/10" x 4 7/10" x 21 7/10" (length x width x height)
- Reliable protection against the hydraulic oil of the feed cylinder entering the cutting chamber; patented hygiene cylinder (optional) makes product contamination with hydraulic oil (only foodstuff hydraulic oil is employed at TREIF) technically impossible
- Particularly cost-effective solution for perfect cutting quality in the mid-range performance class

www.treif.com

HEADQUARTERS:

TREIF Maschinenbau GmbH
Südstraße 4
D-57641 Oberlahr
Tel. +49 2685 944 0
Fax +49 2685 1025
E-Mail: info@treif.com

LOCATIONS:

TREIF S.A.R.L.
22, rue des Tuileries
F-67460 Souffelweyersheim
Tel. +33 3 8818 4018
Fax +33 3 8818 4019
E-Mail: info-france@treif.com

TREIF USA Inc.
50 Waterview Drive, Suite 130
USA-Shelton CT 06484
Tel. +1 203 929 9930
Fax +1 203 929 9949
E-Mail: treifusa@treif.com

TREIF U.K. Ltd.
4 Europa Park
Croft Way Eastways
GB-Witham Essex CM 8 2FN
Tel. +44 1376 504060
Fax +44 1376 504070
E-Mail: info@treif.co.uk

TREIF in Belgium
Villalaan 21
B-9320 Aalst
Tel. +32 53 770813
Fax + 32 53 789666
E-Mail: jo.luybaert@treif.com

TREIF China
TREIF Maschinenbau GmbH
Room 212, No. 188 Zhangyang Rd.
PRC-Shanghai, 200120 China
Tel. +86 21 5879 8255
Fax +86 21 5879 8256
E-Mail: treif.china@treif.com